



Ugelli di iniezione azoto negli stampi

- Costruiti in acciaio inox
- Facilmente installabili
- Minima impronta sul particolare
- Modello brevettato

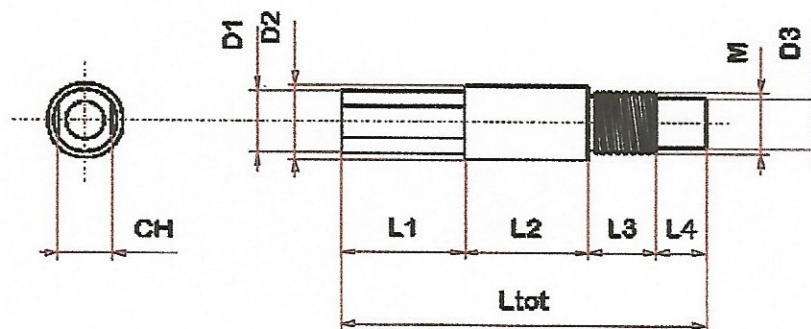

Esempio di montaggio

[mm]	UGL4.3	UGL4.4	UGL4.8	UGL5.4	UGL 5.5	UGL5.8	UGL5.10	UGL5.15	UGL6.10
Ltot	18.0	22.5	26.5	22.5	24.0	26.5	29.0	39.0	29.0
L1	3.0	4.0	8.0	4.0	5.0	8.0	10.0	15.0	10.0
L2	5.5	9.0	9.0	9.0	9.5	9.0	9.5	14.5	9.5
L3	5.5	5.5	5.5	5.5	5.5	5.5	5.5	5.5	5.5
L4	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
D1	3.0	3.0	3.0	3.0	5.0	3.0	5.0	5.0	5.0
D2	5.0	5.0	5.0	6.0	6.0	6.0	6.0	6.0	8.0
D3	3.0	3.0	3.0	4.0	4.0	4.0	4.0	4.0	5.0
M	M4	M4	M4	M5	M5	M5	M5	M5	M6
CH	2.5	2.5	2.5	2.5	4.3	2.5	4.3	4.3	4.3

Esecuzione	Speciale	Standard	Standard	Speciale	Standard	Speciale	Standard	Speciale	Speciale

Accessori	
UGL4CH	Chiave da 2.5 per serraggio ugelli diametro 4 e 5
UGL5CH	Chiave da 4.3 per serraggio ugelli diametro 5 e 6

Il costruttore si riserva di apportare tutte le modifiche ed i miglioramenti necessari, senza nessun preavviso.